


CUSTOMER APPROVED:


DATE:

REV	REVISION RECORD	DATE	NAME
1	根据客户导入图纸绘图,更改C及EPC尺寸	05.25	

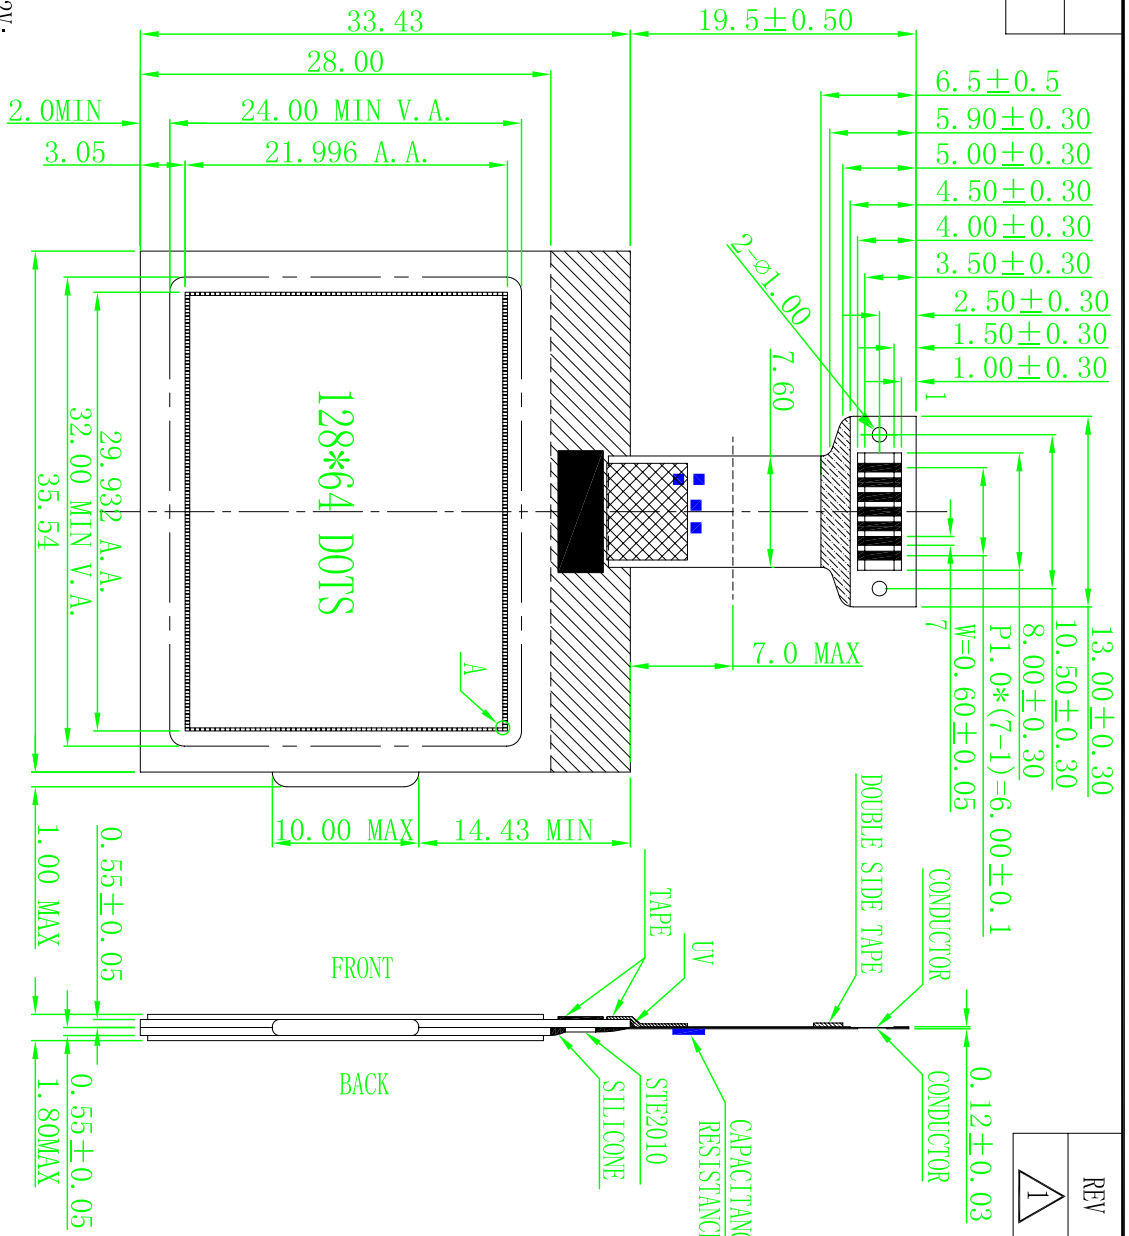

真值表


ROW0	COL0	COL127
ROW31		
ROW40		
ROW71		

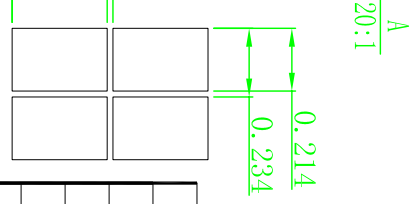

NOTE:

- 1、OPERATING VOLTAGE :3.2V;
- 2、OPERATING CURRENT : NO MORE THAN 2mA;
- 3、LCD PARAMETER : FHSIN Negative, Transmissive, 1/65Duty, 1/9Bias, 8.0V, 6:00 0' Clock ;
- 4、OPERATING TEMPERATURE : 0° C--50° C, STORAGE TEMPERATURE:-10° C--60° C;
- 5、DEFAULT TOLERANCE : ±0.2mm;
- 6、DRIVER AND CONTROLLER TYPE : STEP2010;
- 7、ROHS STANDARD: YES ; NO
- 8、REFERENCE: CUSTOMER SAMPLE ; CUSTOMER SPECIFICATION ; NONE

NO.	SYMBOL
7	VDD1
6	VDD2
5	/RES
4	SDA
3	SCL
2	VSS
1	VLCD



TITLE	模块外形图	CUSTOMER NUMBER	030+0408+1+000	REV	A
DES' D BY	姜跃庆	PRODUCT MODEL	KMC12864-Z-00-DNH	UNIT	mm
CHK' D BY		CUSTOM NUMBER		DATE	2006.05.25
APPROVED		SCALE	2: 1	NO.	1/1