


CN1

1	2	3	4	5	6	7	8	9	10
VSS	VDD	VO	/WR	/RD	/CS	A0	RST	D0	D1
11	12	13	14	15	16	17	18	19	20
D2	D3	D4	D5	D6	D7	NC	VOUT	A	K

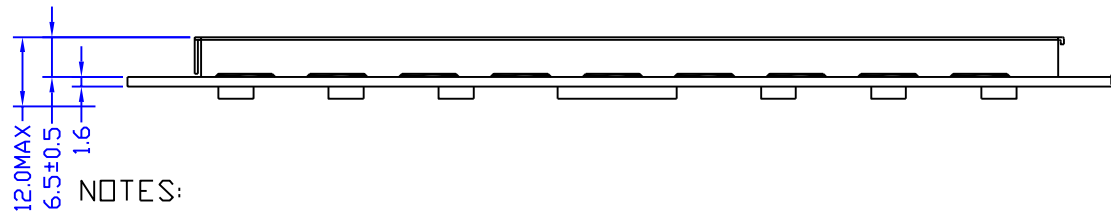

NOTES:

- 1.DISPLAY TYPE: STN/BLUE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSMISSIVE/NEGATIVE
- 4.OPERATING TEMP: -20 °C---+70 °C
- 5.STORAGE TEMP: -25 °C---+80 °C
- 6.VDD: +5V
- 7.DRIVE METHOD: 1/240DUTY 1/17BIAS
- 8.DRIVE: SED1335FOA
- 9.BACKLIGHT: CCFL(WHITE)
- 10.ALL UNMARKED TOLERANCES:±0.3mm

北京中显电子有限公司, www.zxlcd.com			
绘图:	型号:	ZX320240A LED	单位: mm
审核:	版号:	08V01	电话: 52926620
批准:	日期:		传真: 52926621