


4.MECHANICAL DIMENSION



PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12
SYMBOL	CSB	RST	A0	SCL	SDA	VDD	VSS	V0	XV0	VG	NC	NC

DISPLAY TYPE: FSTN/POSITIVE
 POLARIZER: TRANSFLECTIVE
 VIEWING DIRECTION: 6:00-CLOCK
 DRIVE METHOD: 1/64DUTY,1/9BIAS
 LCD OPERATING VOLTAGE: 9.0v
 LCM OPERATING VOLTAGE: 3.0v
 OPERATING TEMP: -10 TO 60 Deg.C
 STORAGE TEMP: -20 TO 70 Deg.C
 CONNECTOR: COG
 UNSIGNED TOLERANCE: ±0.20

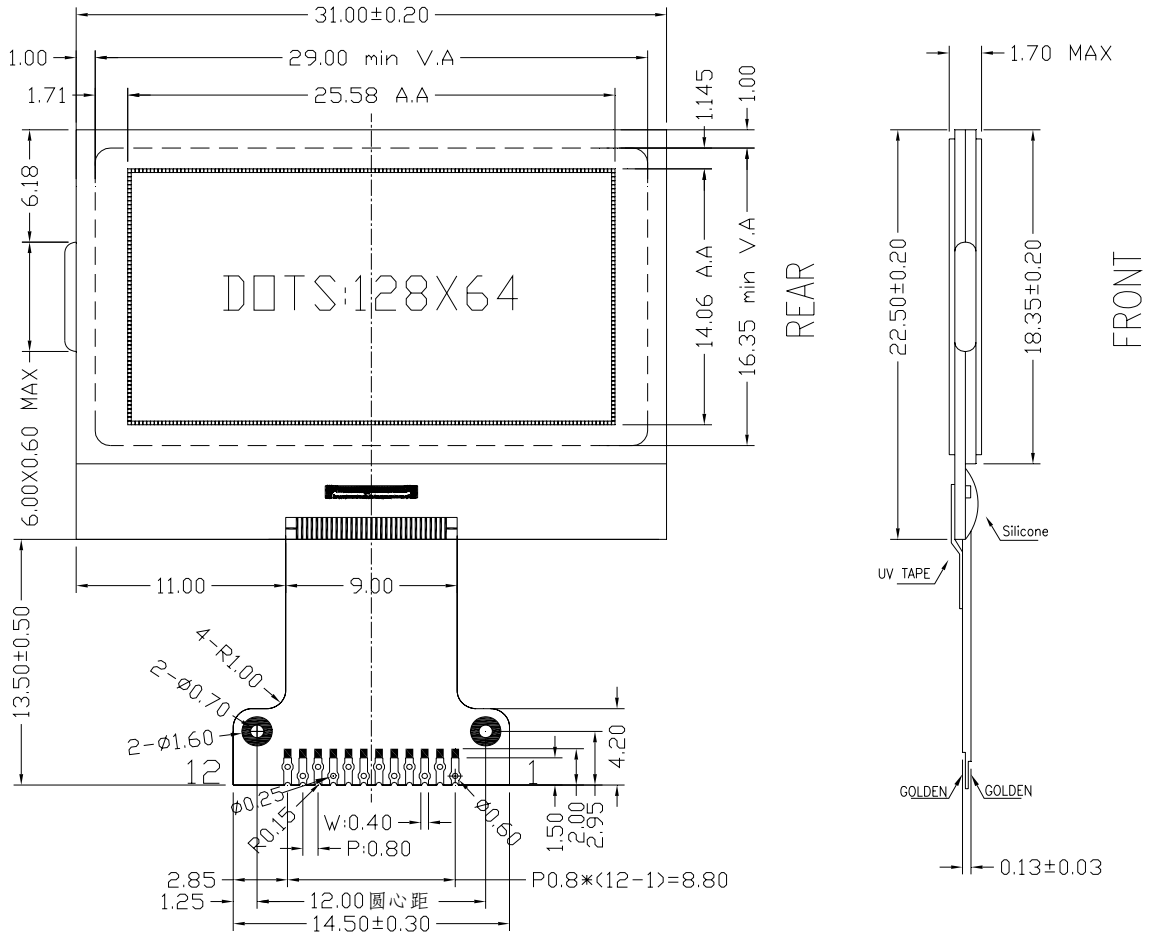