


4.MECHANICAL DIMENSION



NO	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
PIN	NC	IRS	NC	P/S	C86	NC	VR	V0	V1	V2	V3	V4	NC	CAP2N	CAP2P	CAP1P	CAP1N	CAP3P
NO	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
PIN	VOUT	VSS	VDD	D7/SID	D6/SCLK	D5	D4	D3	D2	D1	D0	/RD(E)	/WR R/W	A0 RS/	/RES	/CS1	NC	NC

DISPLAY TYPE: STN/Y-G
 POLARIZER: TRANSMISSIVE
 VIEWING DIRECTION: 6:00-CLOCK
 DRIVE METHOD: 1/65DUTY,1/9BIAS
 LCD OPERATING VOLTAGE: 9.4v
 LCM OPERATING VOLTAGE: 3.0v
 OPERATING TEMP: -10 TO 50 Deg.C
 STORAGE TEMP: -20 TO 60 Deg.C
 CONNECTOR: COG

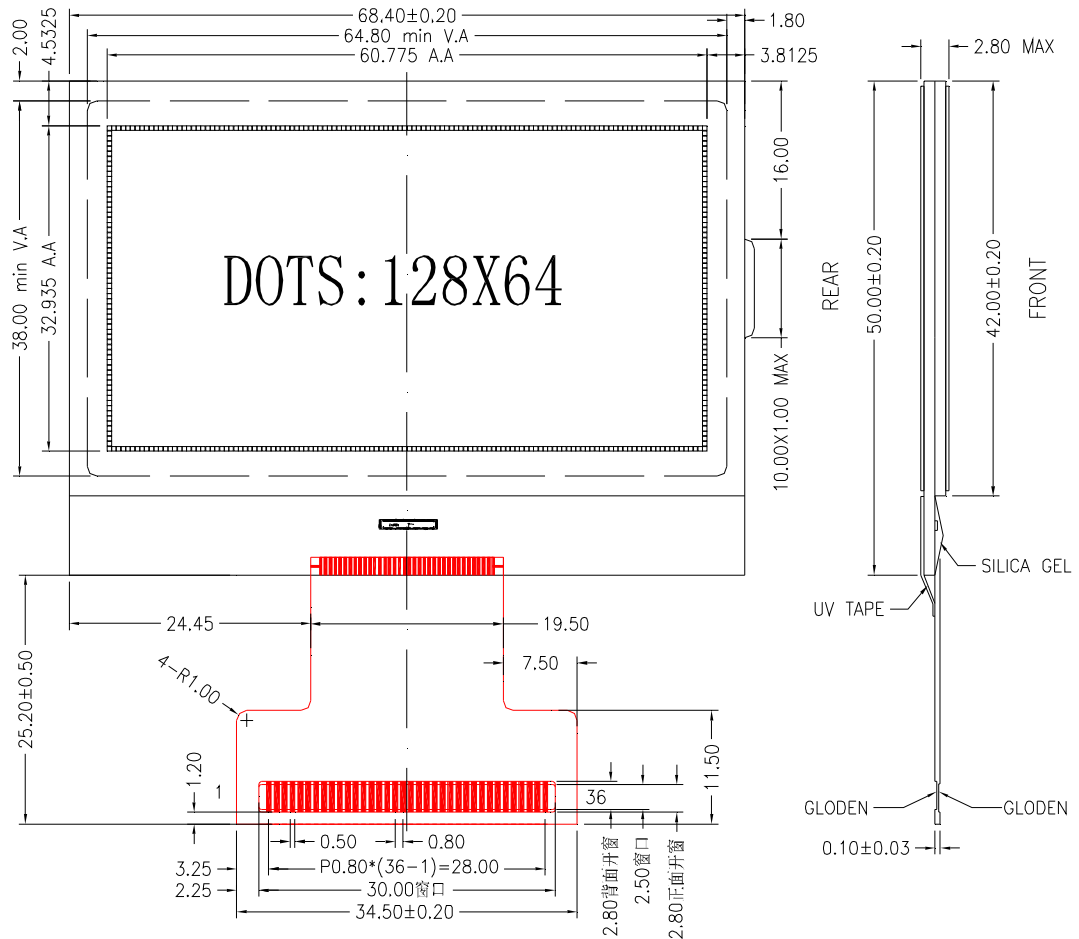