
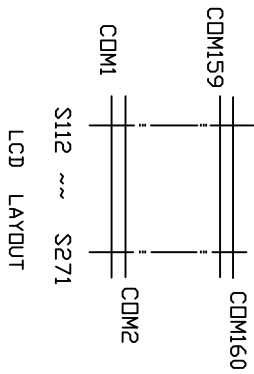


VIEW DIRECTION

模块工作电压为3.3-5V均可正常工作。



1	NC	16	WR0
2	VLCD	17	RST
3	VS+	18	D0
4	VS-	19	D1
5	VB0-	20	D2
6	VB1-	21	D3
7	VB1+	22	D4
8	VB0+	23	D5
9	VDD	24	D6
10	VSS	25	D7
11	TST4	26	D8
12	BM0	27	D13
13	CS0	28	D15
14	CD	29	NC
15	WR1		

REV	DESCRIPTION:	DATE
01	First issue	Jan-15-2009

NOTES:

1. DISPLAY TYPE: FSTN/POSITIVE
2. OPERATING VOLTAGE: 16.5V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. DRIVE MODE: 1/160D,1/10B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSPARENT
8. CONNECTOR: COG/UC1698U(V1.1)
9. CUSTOMER No.:

此款COG液晶工作电压范围在3.3-5V均可正常工作。

DESCRIPTION:		LCD+PC	
GENERAL TOL: ±0.2	MODEL No.	160160	
DO NOT SCALE THIS DRAWING.		Unit: mm	Draw xqc
			Chk
			Apr