


中文图形液晶显示说明书

ZX12232G-2

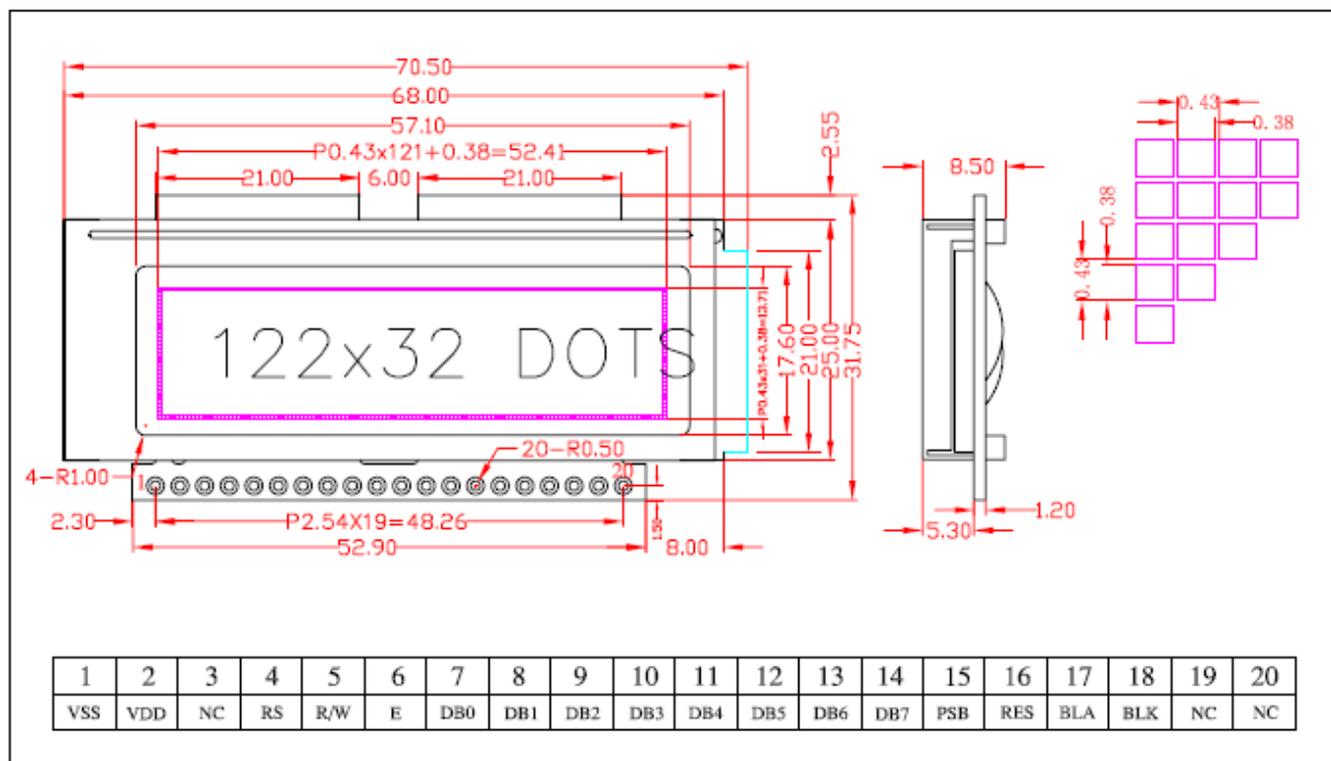

Pin	Symbol	Level	Function
1	VSS	0V	GND
2	VDD	+5V	Power supply
3	NC	--	No connection
4	RS(CS)	H/L	H:Data L:Instructioncode (chip enable for serial mode)
5	R/W(SID)	H/L	H:Read L:Write (Serial data for serial mode)
6	E(SCLK)	H,H-L	Enable(clock for serial mode)
7	DB0	H/L	Data bus line
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	
15	PSB	H/L	H:Parallel mode L:Serial mode (JP1:left-Vdd,right-Vss)
16	/RST	L	Reset signal active"L"
17	LEDK	0V	Power supply for LED backlight
18	LEDA	+5V	
19	NC	NC	NC
20			