


上出脚	PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
COM	1G	2G	2F	2A	2B	3G	3F	3A	3B	4G	4F	4A	4B	
下出脚	PIN	14	15	16	17	18	19	20	21	22	23	24	25	26
COM	COM	1BC	2E	2D	2C	DP1	3E	3D	3C	DP2	4E	4D	4C	

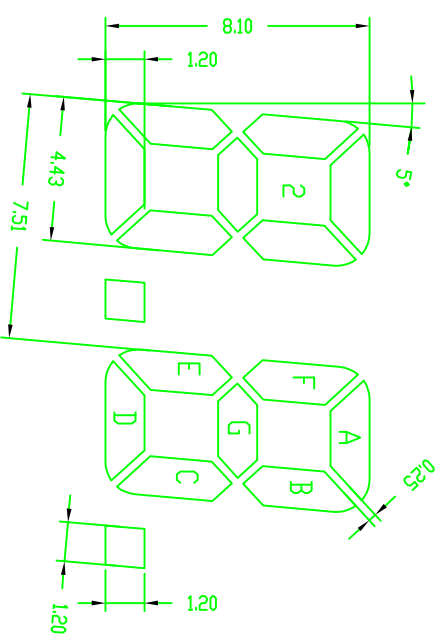

北京中显电子有限公司 010-82626833

确认: Confirm all type drawings of this and pass back!		NOTE:	
DISPLAY TYPE: POSITIVE, TN	DRIVER METHOD: STATIC	版次	修改内容简述
VIEW DIRECTION: 6 O'CLOCK	OPERATING VOLTAGE: 4.0V		
POLARIZER MODE: REFLECTIVE	OPERATING TEMPERATURE: -20 °C TO 70 °C		
CONNECTORS: PIN	STORAGE TEMPERATURE: -30 °C TO 90 °C		
设计	审核	日期	单位
李红梅	李红梅	2008.01.10	A/0
批准			页码
			1/4
			型号
			编号