




正面视图

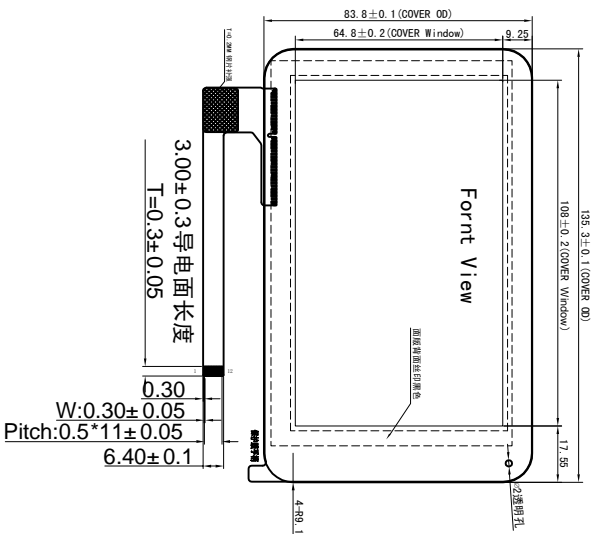

侧面视图

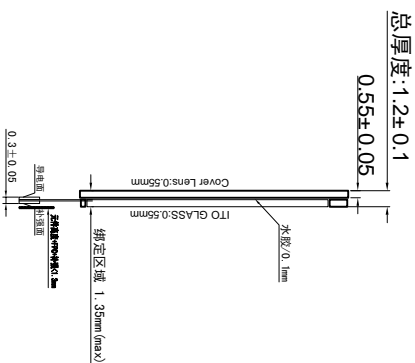

背面视图

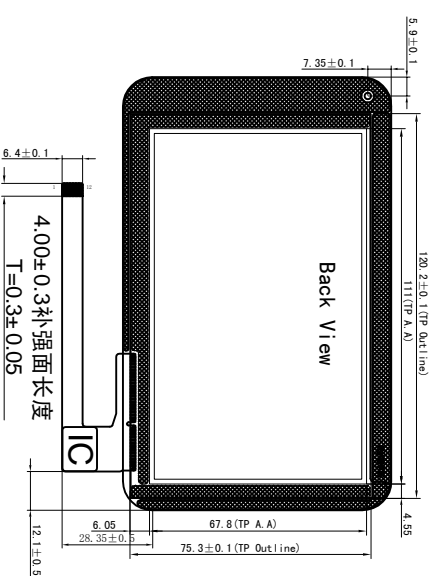

技术参数:

1. 产品结构:

COVER GLASS+ITO GLASS+FPC (IC) +背胶

2. 表面硬度: 6H

3. 透光率85%

3. 工作温度: -10°C~+60°C, 45%~85%RH

4. 储存条件: -20°C~+70°C, 5%~95%RH

5. 未标注公差 ±0.2mm

6. 符合“ROHS”标准

MATERIAL CHARACTERISTICS		定义	PIN
Property	Requirement	1	END
IC	ZET6221WMA (18*10)	2	NC
COVER GLASS	0.55mm	3	NC
SENSOR GLASS	0.55mm	4	NC
背胶	0.175mm	5	END
		6	END
		7	SMA
		8	SCL
		9	RESET
		10	INT
		11	3.3V
		12	3.3V

北京中显电子有限公司

HW ZXD.004

Customer Ref.	Model No.	Drawing Title	Unit	Scale	Page
5寸电容屏	E-C50002-02	—	mm	1:1	of
Part No.	Approve	Material	Tolerance	Unit	Scale
Checked	Draw	Date	Rev.	01	
Drawing No.	Draw	Date	2012-07-26	Rev.	01