

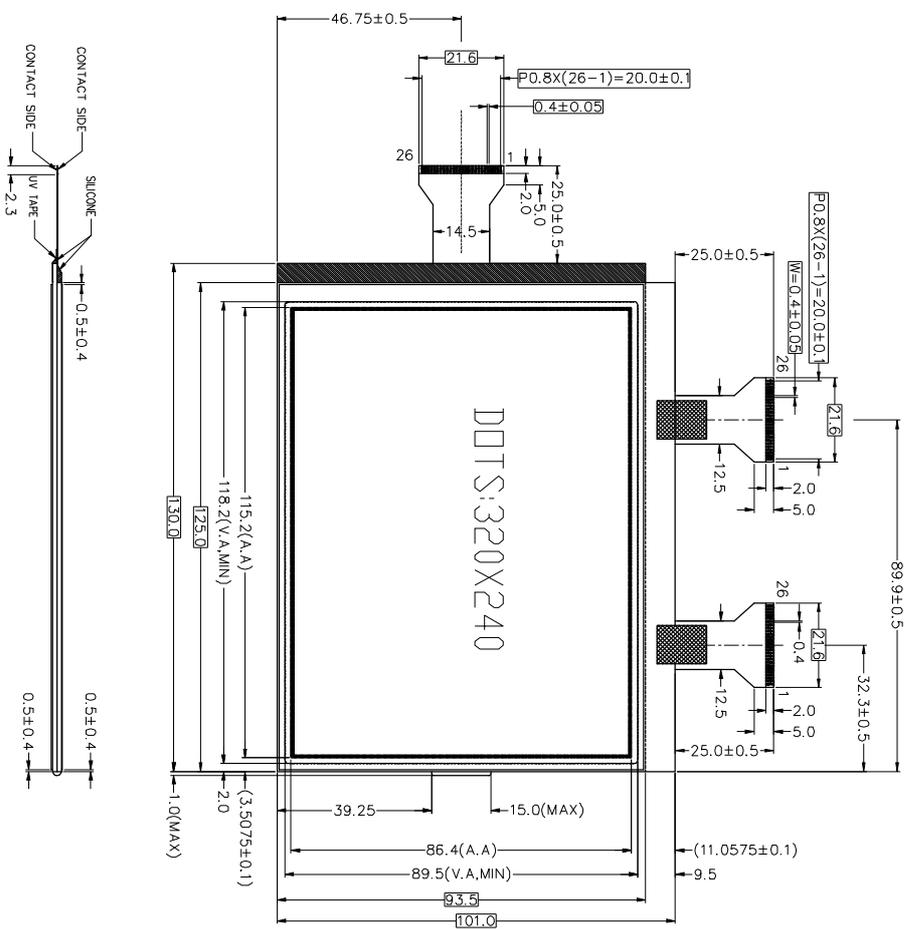


SYM	REV	DESCRIPTION	DATA
G-1		NEW DRAWING	2010.05.20

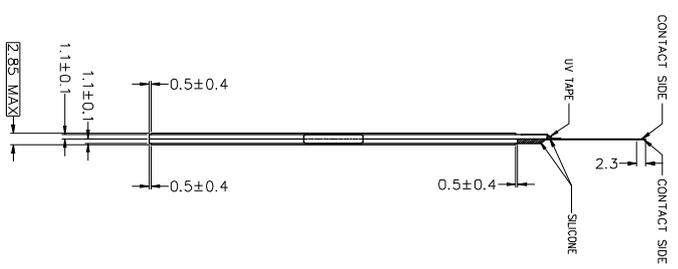

- 1.DISPLAY TYPE: STN
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSMISSIVE /NEGATIVE
- 4.IC: NT7701,NT7702
- 5.OPERATING TEMP: -20°C-+70°C
- 6.STORAGE TEMP: -30°C-+80°C
- 7.Drive Method: 1/240duty 1/16bias
- 8.LCD OPERATING VOLTAGE: 24.0V
- RECOMMEND VDD= 5.0V
- 9.BACKLIGHT: WITHOUT BACKLIGHT
- 10.CONNECTOR: FPC
- 11.UNMARKED TOLERANCES: ±0.3mm
- 12.THE CONTROLLED DIMENSION MASK TO BE : □
- 13.REQUIREMENT ON ENVIRONMENTAL PROTECTION: RoHS



SEG1				SEG2				COM					
PIN No	SYMBOL												
1	V0L	14	D5	1	V0L	14	D5	1	V0R	14	D5		
2	V12L	15	D6	2	V12L	15	D6	2	V12R	15	D4		
3	V43L	16	D7	3	V43L	16	D7	3	V43R	16	D3		
4	GND	17	XCK	4	GND	17	XCK	4	GND	17	D2		
5	LR	18	D.DFF	5	LR	18	D.DFF	5	MD	18	D1		
6	VDD	19	LP	6	VDD	19	LP	6	LR	19	D0		
7	SC	20	E1D1	7	SC	20	E1D1	7	FR	20	E1D2		
8	E1D2	21	FR	8	E1D2	21	FR	8	E1D1	21	SC		
9	D0	22	MD	9	D0	22	MD	9	LP	22	VDD		
10	D1	23	GND	10	D1	23	GND	10	D.DFF	23	GND		
11	D2	24	V43R	11	D2	24	V43R	11	XCK	24	V43L		
12	D3	25	V12R	12	D3	25	V12R	12	D7	25	V12L		
13	D4	26	V0R	13	D4	26	V0R	13	D6	26	V0L		

型号：ZX320240-07焊接式

北京中显电子有限公司

网址：WWW.ZXLCD.COM