

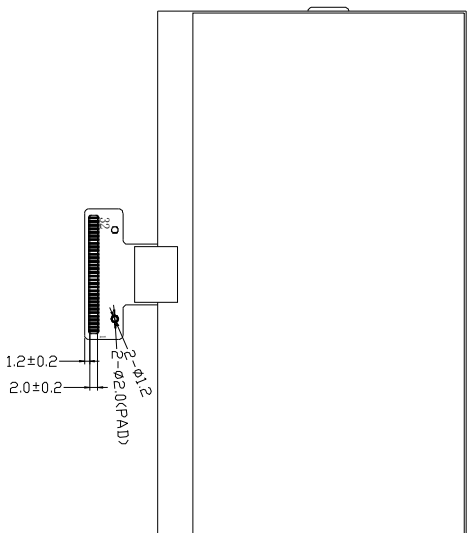


SYM	REV	DESCRIPTION	DATA
G-1		NEW DRAWING	2009.11.17

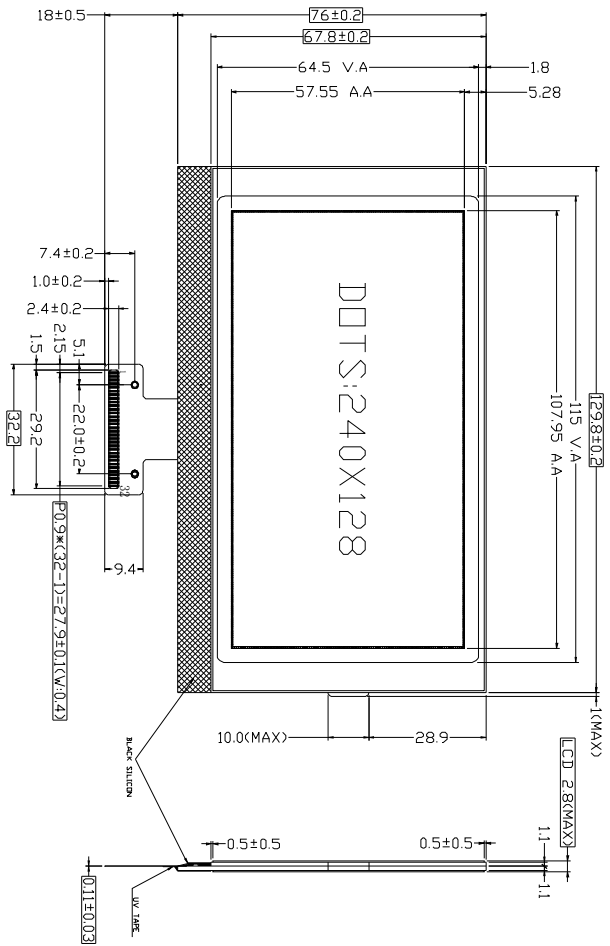

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NC	NC	W/COUT	W/CIN	VS+	VS-	VB0-	VB1-	VB1+	VB0+	VDD23	VDD	VSS	TS14	BMI	BMO
CS1	CS0	CD	WR1	WR0	RST	D0	D1	D2	D3	D4	D5	D6	D7	NC	NC



DETAIL OF DOT:

- 1.DISPLAY TYPE: STN/BLUE  
2.VIEWING DIRECTION: 6:00  
3.POLARIZER MODE: TRANSMISSIVE/NEGATIVE  
4.IC: UC1698U  
5.OPERATING TEMP: -20°C--+70°C  
6.STORAGE TEMP: -30°C--+80°C  
7.Driver Method: 1/128duty 1/12bias  
8.LCD OPERATING VOLTAGE: 16.0V  
RECOMMEND VDD: 3.3V  
9.BACKLIGHT: WITHOUT BACKLIGHT  
10.UNMARKED TOLERANCES: ±0.3mm  
11.THE CONTROLLED DIMENSION MASK TO BE :   
12.REQUIREMENT ON ENVIRONMENTAL PROTECTION: ROHS