


PIN	NO.
VLCD	1
VS+	2
VS-	3
VB0-	4
VB1-	5
VB1+	6
VB0+	7
VDD	8
VSS	9
TST4	10
BM0	11
CS0	12
CD	13
RD	14
WR	15
RST	16
DB0	17
DB1	18
DB2	19
DB3	20
DB4	21
DB5	22
DB6	23
DB7	24

- NOTES:
1. DISPLAY TYPE: FSTN
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSPARENT/POSITIVE
 4. LOGIC VOLTAGE: VDD=3.3V
 5. LCD OPERATING VOLTAGE: 16.50V
 6. DRIVE METHOD: 1/160 DUTY 1/10 BIAS
 7. OPERATING TEMP: -20°C~+70°C
 8. STORAGE TEMP: -30°C~+80°C
 9. CONTROLLER: UC1698U
 10. BACKLIGHT: WITHOUT BACKLIGHT
 11. UNMARKED TOLERANCES: ±0.2mm
 12. REFERENCE DIMENSIONS: ()
 13. CONTROLLED DIMENSIONS: []
 14. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: ROHS



DETAIL A:

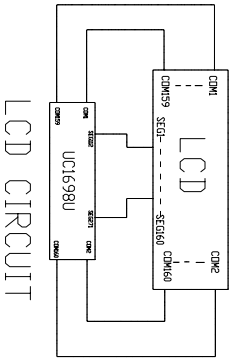