



DISPLAY PATTERN



DISPLAY TYPE: STN/YELLOW-GREEN
 POSITIVE
 DISPLAY MODE: REFLECTIVE
 VIEWING DIRECTION: 6:00
 DRIVING METHOD: 1/65 DUTY 1/9 BIAS
 OPERATING VOLTAGE: 10.5V
 OPERATING TEMPERATURE: 0°~50°C
 STORAGE TEMPERATURE: -10°~60°C
 CONTROLLER: SPLC501
 UNMARKED TOLERANCE: ±0.3
 INTERFACE:

1	2	3	4	5	6	7	8	9	10	11	12	13
VDD	VSS	VOUT	C3-	C1+	C1-	C2-	C2+	V1	V2	V3	V4	V5
14	15	16	17	18	19	20	21	22	23	24	25	26
CS1	RES	AOP	WR	RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

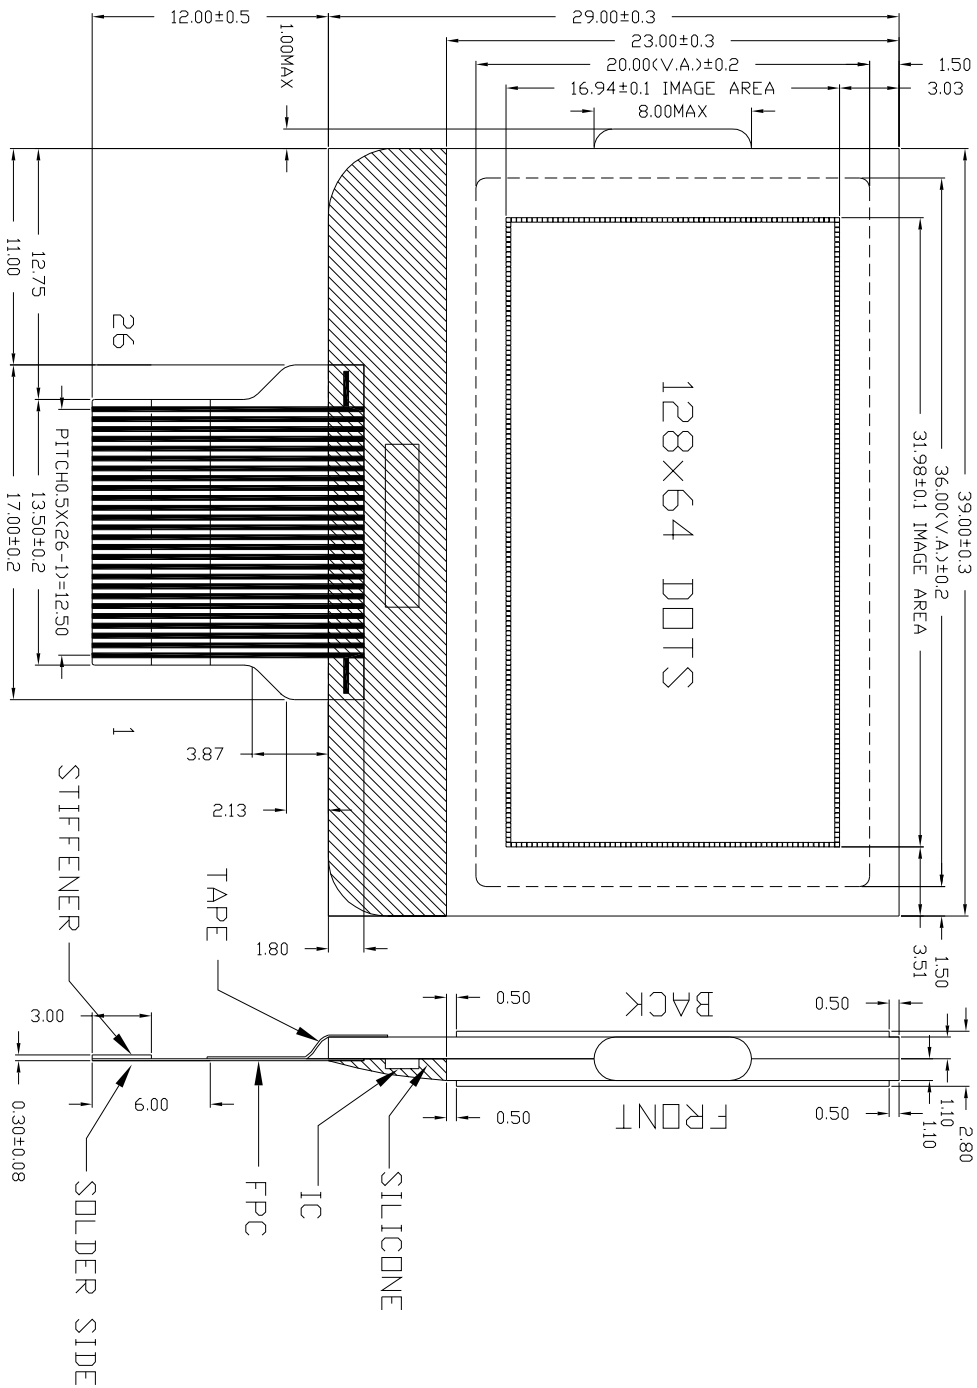

DRAWN:

CHECKED:

QA CHECKED:

APPROVED:

LCM NO: SF839-LCM/C

UNITS: mm

DWG NO: FI-1037-LCM/C

SHEET 1 OF 1

