



3. OUTLINE DIMENSIONS

- NOTES:
1. DISPLAY TYPE: FSTN,
 2. VIEWING DIRECTION: 6 O'CLOCK
 3. POLARIZER MODE: TRANSPARENT
 4. OPERATING TEMP: -20°C~+70°C
 5. STORAGE TEMP: -30°C~+80°C
 6. VDD: +3V
 7. DRIVE METHOD: 1/160 DUTY, 1/12BIAS
 8. CONTROLLER: UC1611
 9. BACKLIGHT TYPE: WHITE LED (5.0V)
 10. ALL UNMARKED TOLERANCES: ±0.5

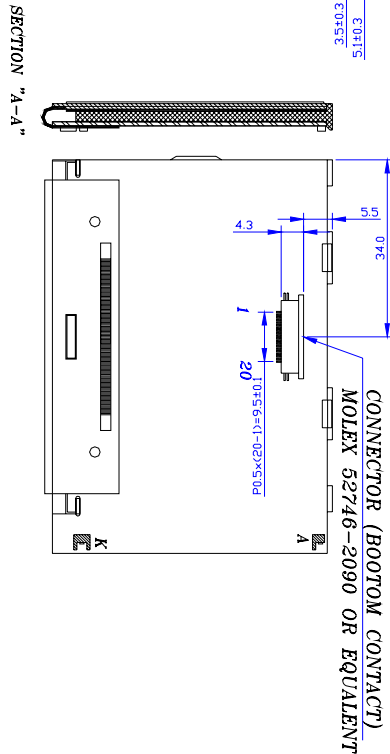

1	2	3	4	5	6	7	8	9	10
VDD	VSS	BMO	WR1	WR0	CD	CS1	/BST	D0	D1
I1	I2	I3	I4	I5	I6	I7	I8	I9	I0
D2	D3	D4	D5	D6	D7	VLED	VSSS	NC	NC

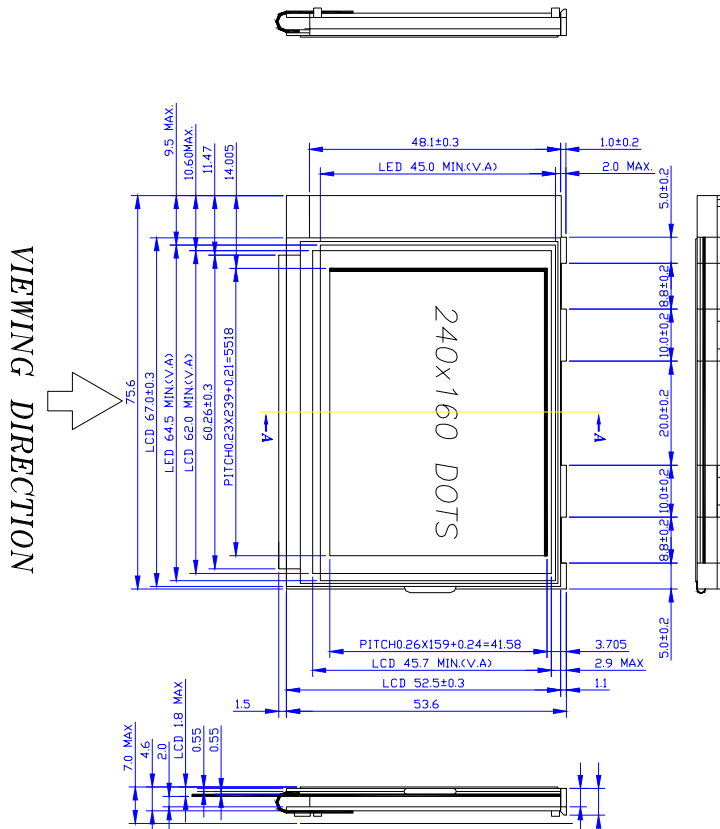