


NO	PIN	NO	PIN
1	VDD	16	VOUT
2	/RES	17	CAP3-
3	A0	18	CAP1+
4	R/W	19	CAP1-
5	E	20	CAP2-
6	D0	21	CAP2+
7	D1	22	V1
8	D2	23	V2
9	D3	24	V3
10	D4	25	V4
11	D5	26	V5
12	D6	27	VR
13	D7	28	VDD
14	VDD	29	IRS
15	VSS	30	VDD

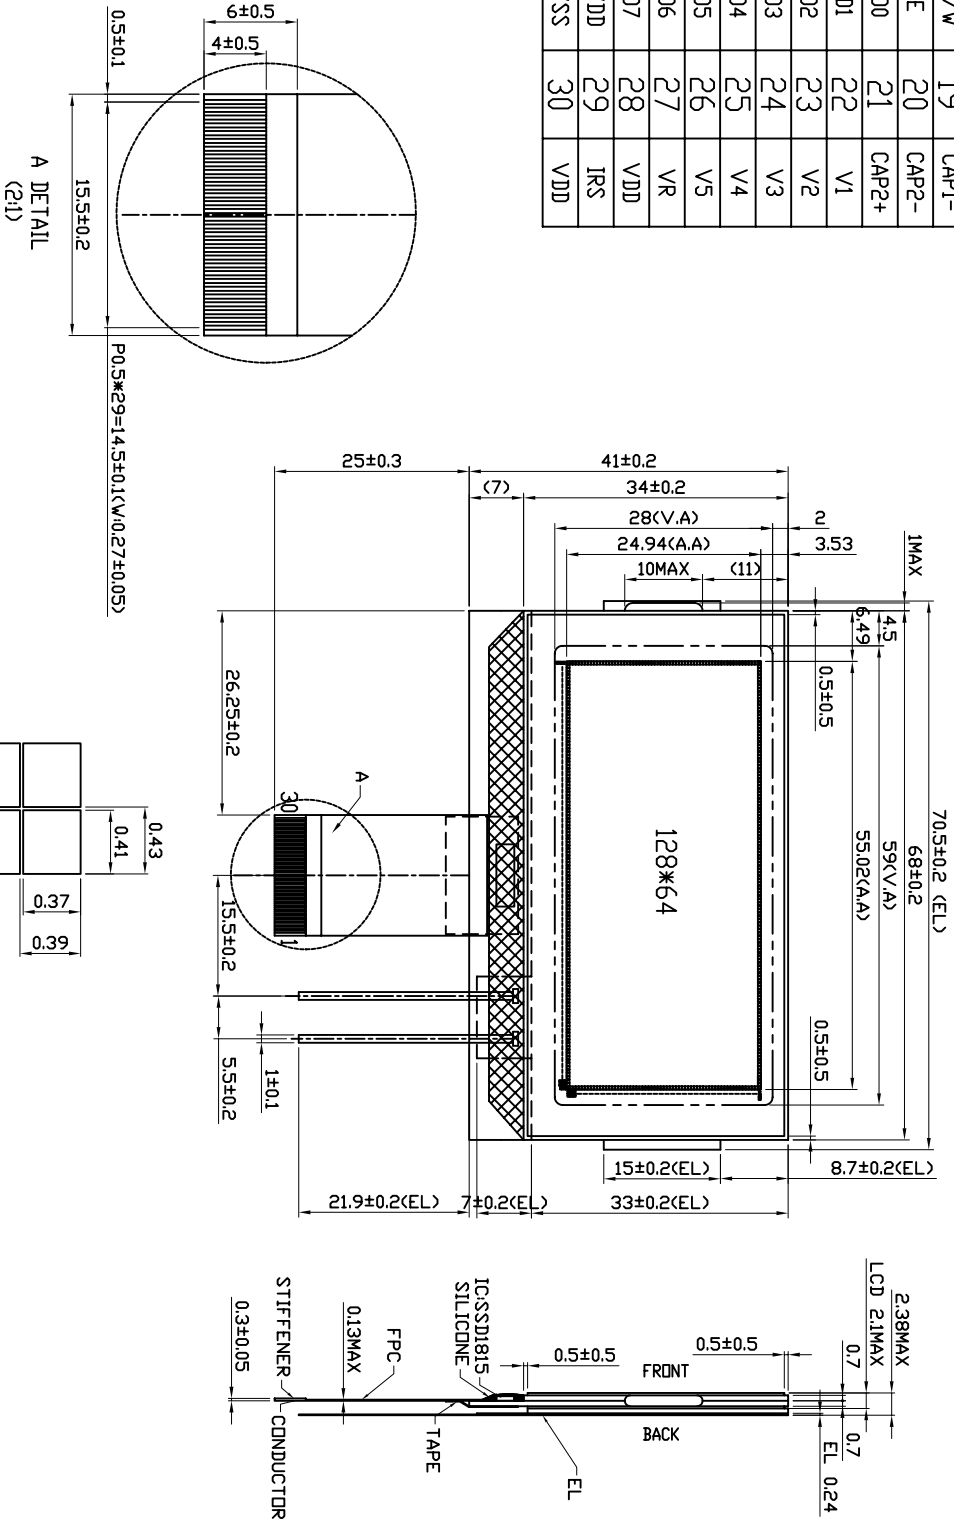

- NOTE:
- 1 DISPLAY TYPE: STN(Y/G)
 - 2 POLARIZER MODE: TRANSPARENT/POSITIVE
 - 3 VIEWING DIRECTION: 12:00
 - 4 DRIVE METHOD: 1/64 DUTY, 1/7 BIAS
 - 5 OPERATING VOLTAGE: 9.8±0.2 V
 - 6 OPERATING TEMP: -10 °C ~+50 °C
 - 7 STORAGE TEMP: -20 °C ~+ 60 °C
 - 8 BACK LIGHT: EL(Y/G)
 - 9 EL DRIVING METHOD: AC 100V, 400HZ
 - 10 IC:SSD1815

SCALE	UNIT
1:1	mm
DESIGN	MODEL NAME
	MSC016DFEGW
DRAWING NO.	DRAWING NO.
	MSC016DMLA
DATE	DATE
	2003.3.5

DATE	REVISION

