SYM	REV	DC/EC NUMBER	DESCRIPTION	DATE
	G-1		NEW	2012.03.05
△	G-2		change the double side tape	2012.08.06

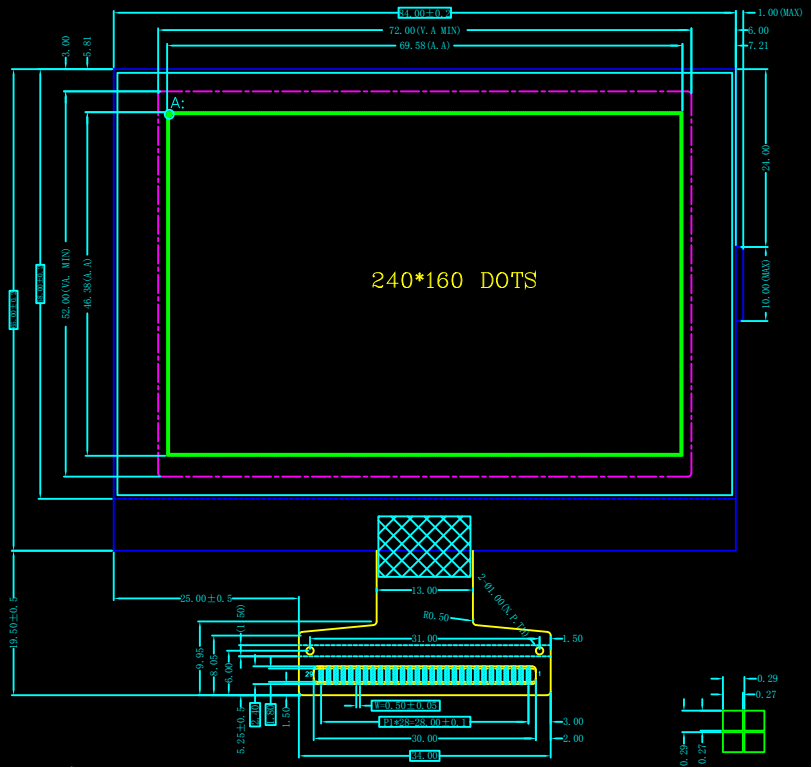

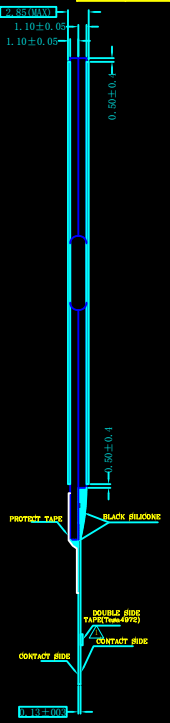

PIN	SYMBOL	PIN	SYMBOL
1	VB0+	16	WR0
2	VB1+	17	CD
3	VB1-	18	CS0
4	VB0-	19	RST
5	VA0+	20	D0
6	VA1+	21	D1
7	VA1-	22	D2
8	VA0-	23	D3
9	VLCD	24	D4
10	VDD	25	D5
11	VSS	26	D6
12	TST4	27	D7
13	BM0	28	D13
14	BM1	29	D15
15	WR1		

DETAIL A:(10:1)

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 12:00
3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
4. IC: UC1611S
5. OPERATING TEMP: -20° C-+70° C
6. STORAGE TEMP: -30° C-+80° C
7. Drive Mothod: 1/160duty 1/13bias
8. LCD OPERATING VOLTAGE: 15.0V
   RECOMMEND VDD= 3.3V
9. BACKLIGHT: Without
10. CONNECTOR: FPC
11. UNMARKED TOLERANCES: ±0.3mm
12. THE CONTROLLED DIMENSION MASK TO BE
13. REQUIREMENT ON ENVIRONMENTAL PROTECTION: RoHS



CONTROL DIMENTION:			PRODUCT NUMBER:	3rd ANGLE	
REFERENCE DIMENTION:	( )				
APPROVED	秦胜旺	2012.08.06			
EE CHECKED	黄海洋	2012.08.06	PART NAME:	UNIT	mm
ME CHECKED	刘毅政	2012.08.06	DRAWING NUMBER: G-2	SCALE	1 : 1
DESIGNED	向彬	2012.08.06	METERIAL NUMBER:	PAGE	1 / 1