

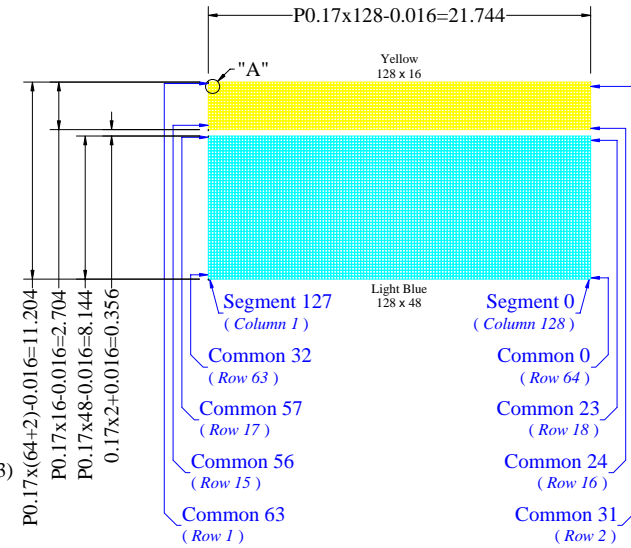
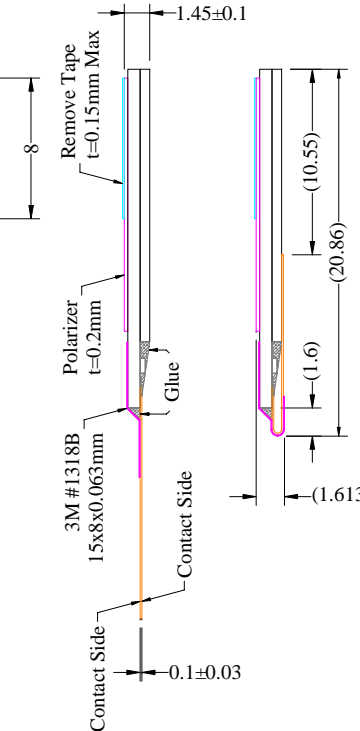


The drawing contained herein is the exclusive property of Univision. It is not allowed to copy, reproduce and or disclose in any formats without permission of Univision.

Item	Date	Remark
A	20090120	Original Drawing

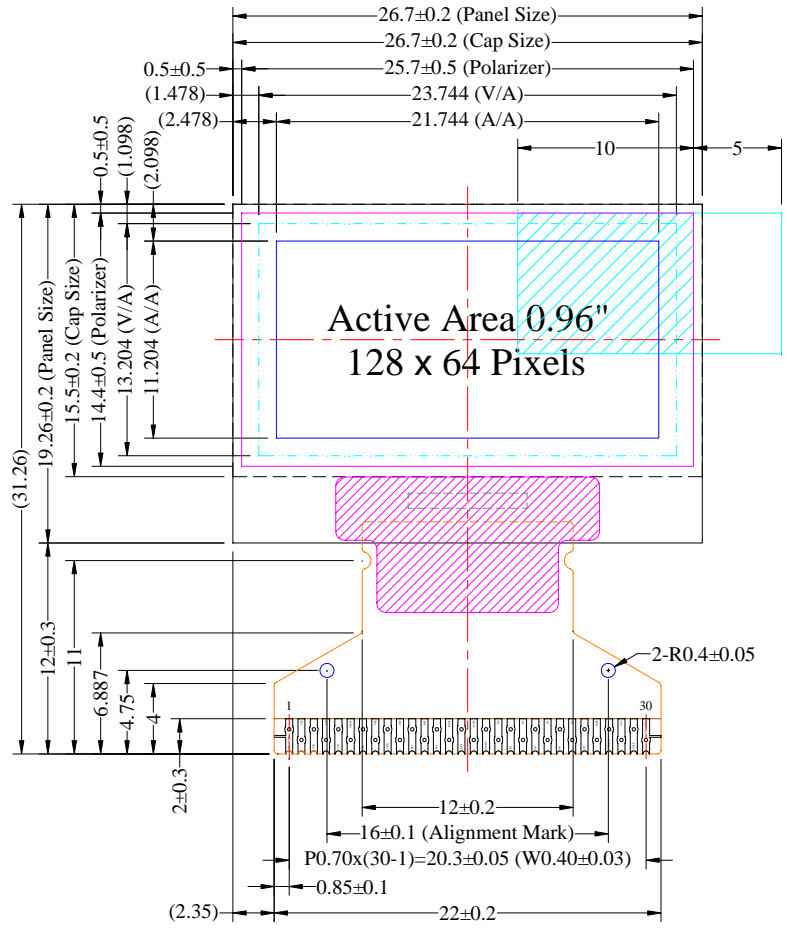

Pin	Symbol
1	N.C. (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	N.C.
8	VSS
9	VDD
10	BS0
11	BS1
12	BS2
13	CS#
14	RES#
15	D/C#
16	R/W#
17	E/RD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	VCOMH
28	VCC
29	VSSS
30	N.C. (GND)

Notes:

- Color: Light Blue & Yellow
- Driver IC: SSD1306
- FPC Number: UT-0206-P05
- Interface:
8-bit 68XX/80XX Parallel, 3-/4-wire SPI, I2C
- General Tolerance: ±0.30
- The total thickness (1.55 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 1.80 Max.

Customer Approval Signature	Univision Technology Inc.						Drawing Number	Rev.	
							DAX2864SDGF50	A	
Unless Otherwise Specified Unit mm General Roughness						Material			
						Soda Lime / Polyimide			
Title		UG-2864HMBEG01 Folding Type OEL Display Module							
		Pixel Number: 128 x 64, Area Color (2), COG Package							
Tolerance		Drawn	E.E.	Panel / E.	P.M.				
Dimension	±0.3	By	Humphrey Lin	James Wang	Ivy Lo	Cherry Lin	Scale	Sheet	Size
Angle	±1	Date	20090120	20090120	20090120	20090120	1:1	1 of 1	A3