


ZX160160M1A单页结构图

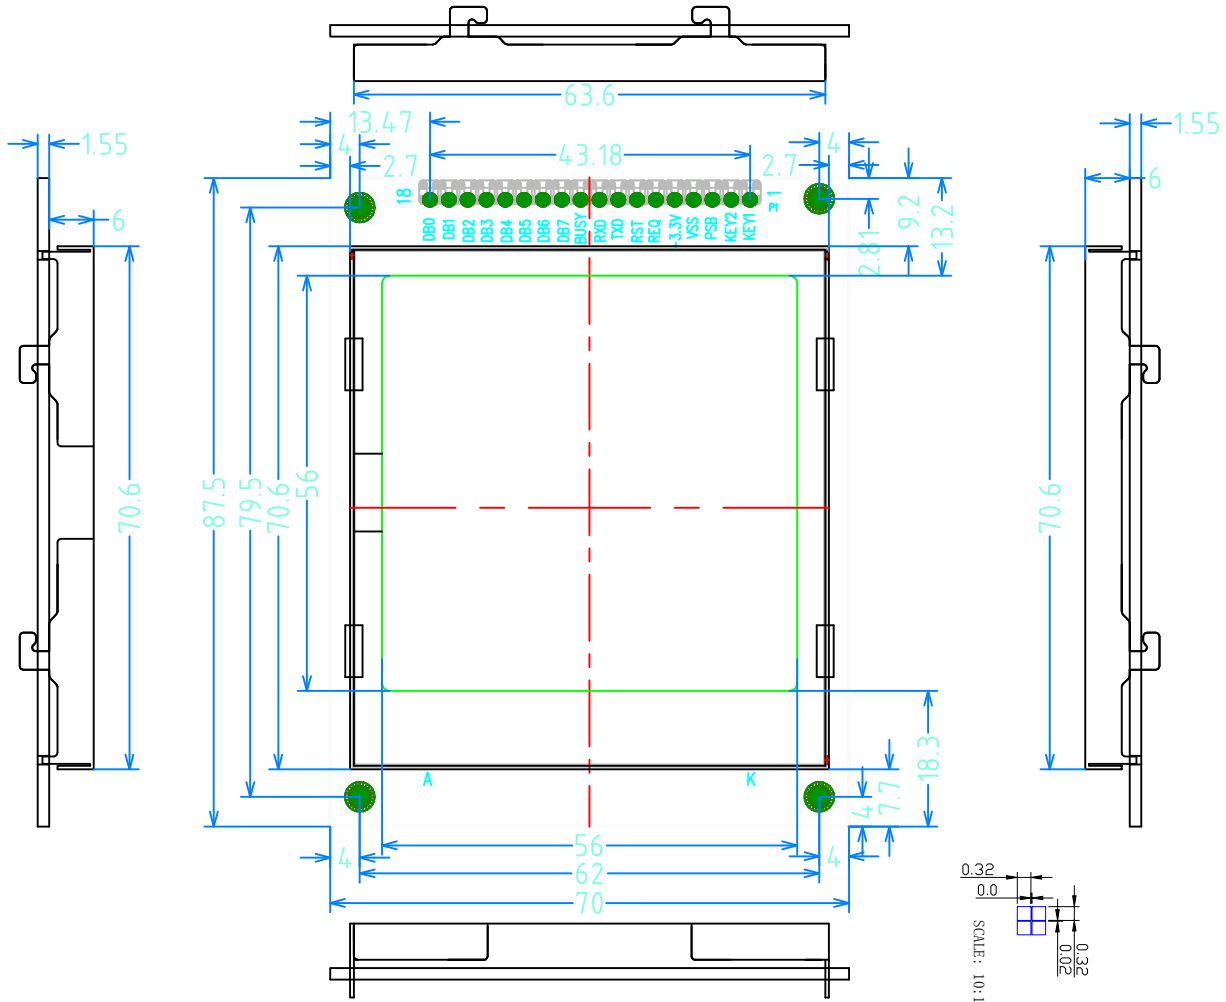

NOTE

- 1 DISPLAY TYPE :FSTN/GRAY/POSITIVE
- 2 VIEWING DIRECTION: 6 O' CLOCK
- 3 POLARIZER MODE : TRANSFLECTIVE
- 4 DRIVE METHOD :1/160DUTY 1/10BIAS
- 5 OPERATING VOLTAGE: 16.5V
- 6 LOGIC VOLTAGE : 2.7~3.6V
- 7 CONTROLLER : ST5668A
- 8 OPERATING TEMP : -20° C~70° C
- 9 STORAGE TEMP : -30° C~+80° C
- 10 BACK LIGHT : LED

版次 A	ZX160160M1A	SHR:	PLASTIC MAT'L CAVITY:
		UNIT:mm	SCALE:
MODEL:	SHEET: 1 OF 1	DRAWING BY:	DATE: 2015-2-14
DWG. NO.	MOLD NO.	CHECK BY:	APPROVED:
北京中显电子有限公司			