



ZX240128M1A单页结构图

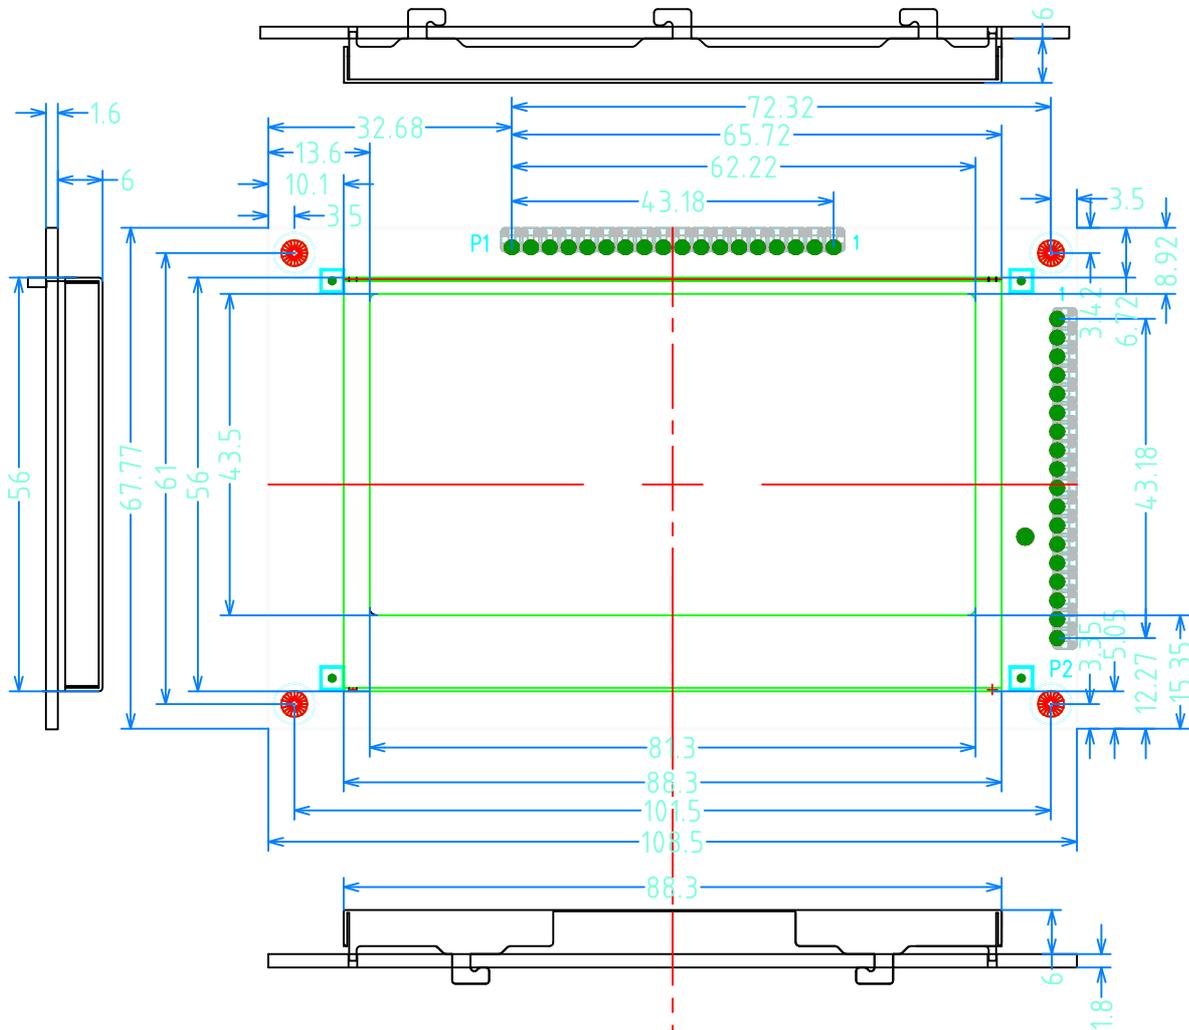

P1,P2						P3					
PIN NO.	SIGNAL										
1	KEY1	7	RST	13	DB5	1	N.C	7	TXD	13	N.C
2	KEY2	8	TXD	14	DB4	2	N.C	8	TXD	14	N.C
3	PSB	9	RXD	15	DB3	3	VSS	9	N.C	15	VDD
4	VSS	10	BUSY	16	DB2	4	VSS	10	N.C	16	VDD
5	+3V	11	DB7	17	DB1	5	N.C	11	RXD	17	N.C
6	REQ	12	DB6	18	DB0	6	N.C	12	RXD	18	N.C

- NOTE**
- 1 DISPLAY TYPE : STN/POSITIVE
 - 2 VIEWING DIRECTION : 6 O'CLOCK
 - 3 POLARIZER MODE : TRANSFLECTIVE
 - 4 DRIVE METHOD : 1/128DUTY 1/12BIAS
 - 5 OPERATING VOLTAGE : 16.0V
 - 6 LOGIC VOLTAGE : 3.0 V
 - 7 CONTROLLER : ST5668A
 - 8 OPERATING TEMP : -20° C----70° C
 - 9 STORAGE TEMP : -30° C----80° C
 - 10 BACK LIGHT : LED/

版次 A	ZX240128M1A	SHR:	PLASTIC MAT'L CAVITY:
MODEL:	SHEET: 1 OF 1	UNIT:mm	SCALE:
DWG. NO.	MOLD NO.	DRAWING BY:	DATE: 2015-2-14
		CHECK BY:	APPROVED:

北京中显电子有限公司