


# ZX128160M2A 单页结构图

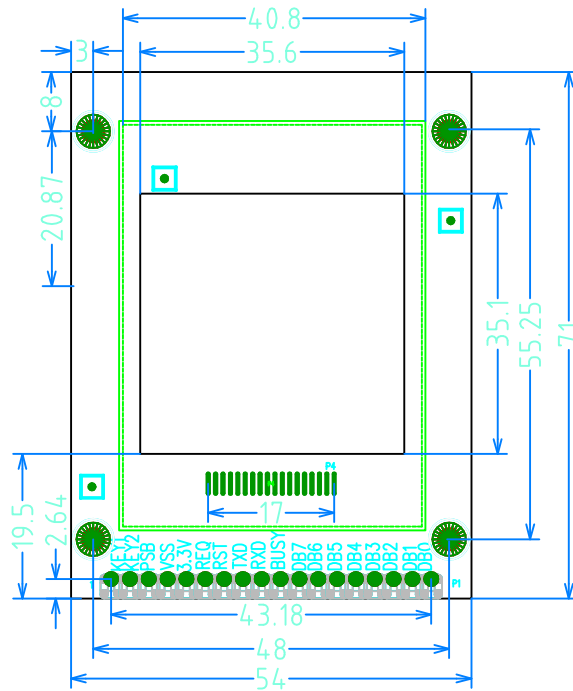

P1, P4

PIN NO.	SIGNAL	PIN NO.	SIGNAL	PIN NO.	SIGNAL
1	KEY1	7	RST	13	DB5
2	KEY2	8	TXD	14	DB4
3	PSB	9	RXD	15	DB3
4	VSS	10	BUSY	16	DB2
5	3.3V	11	DB7	17	DB1
6	REQ	12	DB6	18	DB0

P3

PIN NO.	SIGNAL	PIN NO.	SIGNAL	PIN NO.	SIGNAL
1	N.C	7	TXD	13	N.C
2	N.C	8	TXD	14	N.C
3	VSS	9	N.C	15	VDD
4	VSS	10	N.C	16	VDD
5	N.C	11	RXD	17	N.C
6	N.C	12	RXD	18	N.C

## NOTE

- 1 DISPLAY TYPE : FSTN
- 2 VIEWING DIRECTION: 6 O'CLOCK
- 3 POLARIZER : TRANSMISSIVE
- 4 DRIVE METHOD : 1/160DUTY 1/10BIAS
- 5 OPERATING VOLTAGE: 15.0V (FOR REFERENCE VOLTAGE)
- 6 LOGIC VOLTAGE : 2.7~3.6V
- 7 CONTROLLER : ST5668A
- 8 OPERATING TEMP : -10° C----+60° C
- 9 STORAGE TEMP : -20° C----+70° C
- 10 BACK LIGHT : LED

版次 A	ZX128160M2A_v04	SHR.:	PLASTIC MAT'L CAVITY:
MODEL:	SHEET: 1 OF 1	UNIT:mm	SCALE:
DWG. NO.:	MOLD NO.:	DRAWING BY:	DATE: 2015-2-14
		CHECK BY:	APPROVED:
北京中显电子有限公司			